


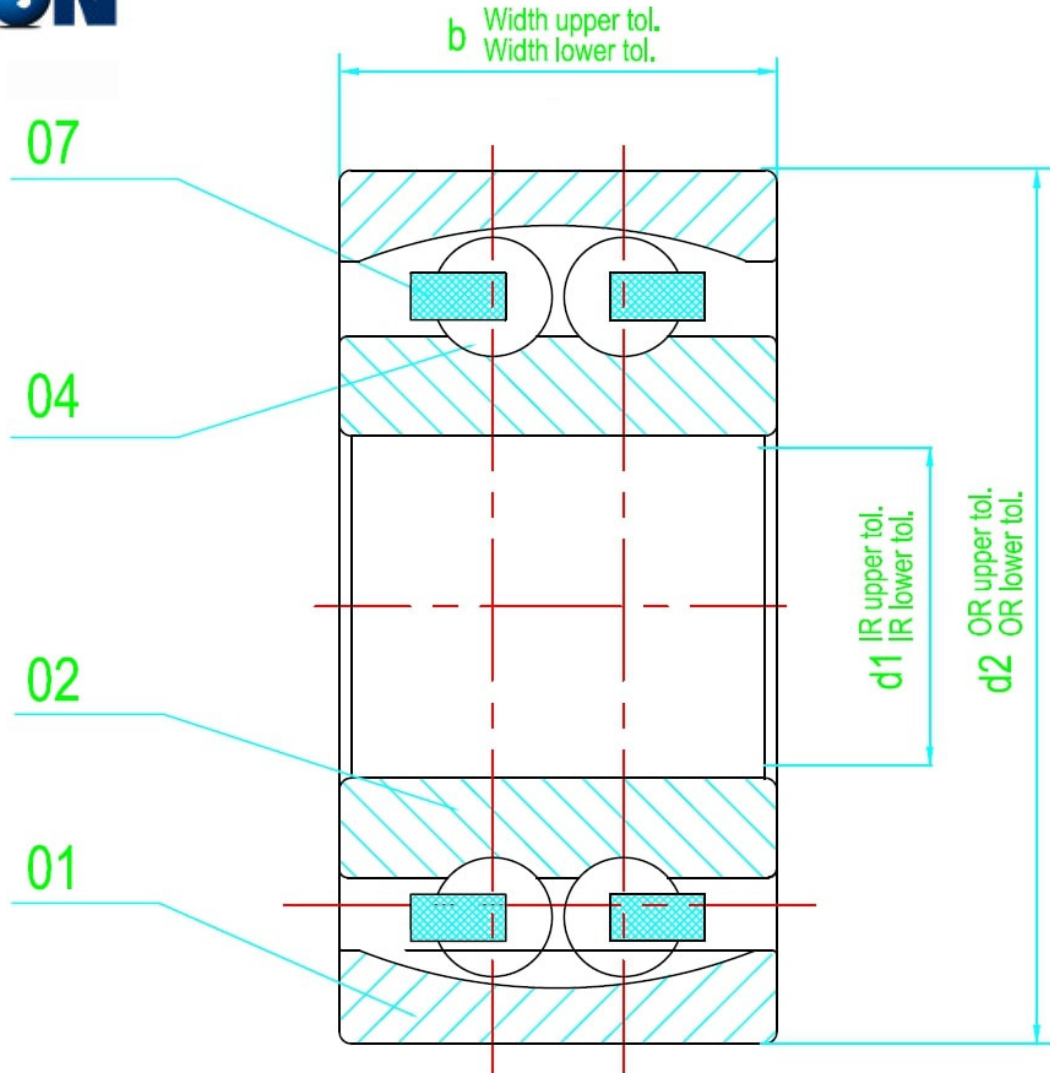

## REFERENCE No: 2316

double\_row\_aligning

## WORKING INFORMATION

|                            |            |        |
|----------------------------|------------|--------|
| Radial Play (mm)           | 0.01-0.03  |        |
| Load Rating                | C, dyn. N  | 139000 |
|                            | C, stat. N | 48500  |
| Weight (g)                 | 6200       |        |
| Limiting Speeds (x1000rpm) | Oil        | -      |
|                            | Grease     | 5.7    |

## DIMENSIONS (mm)

|    |                            |
|----|----------------------------|
| d1 | 80.00 <sup>0</sup> -0.015  |
| d2 | 170.00 <sup>0</sup> -0.025 |
| b  | 58.00 <sup>0</sup> -0.02   |
|    |                            |
|    |                            |
|    |                            |


## INNER DESIGN

| Part No. | Name       | Material  |
|----------|------------|-----------|
| 04       | Balls      | AISI52100 |
| 02       | Inner Ring | AISI52100 |
| 01       | Outer Ring | AISI52100 |
|          |            |           |

Options and  
Applications



**ZON™** Bearings are used and trusted across  
a wide range of market sectors

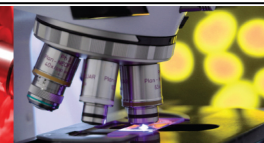

\* The information provided in this technical drawing is subject to our [disclaimer](#)